


Einfachwirkende Zylinder

– ohne Befestigungen –

max. 250 bar
ohne Befestigungen
mit Befestigungsmöglichkeit

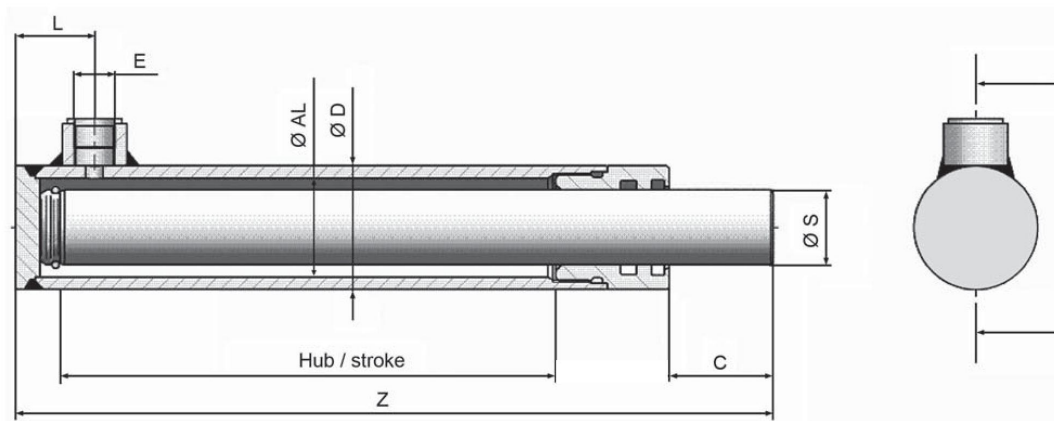

Mit Kolbenstangenführung Typ "CGT" (Hydraulikguss UNI5007-G25)

Typ	Bezeichnung	Hub	Ø D	Ø AL	Ø S	Z	E	C	L	Kg
112-010-01000	EW30-200	200	50	40	30	326	3/8"	40	23	3,64
112-010-01050	EW30-250	250				376				4,19
112-010-01100	EW30-300	300				426				4,75
112-010-01150	EW30-350	350				476				5,31
112-010-01200	EW30-400	400				526				5,86
112-010-01250	EW30-500	500				626				6,96
112-010-01300	EW40-200	200	60	50	40	338	3/8"	45	26	5,64
112-010-01350	EW40-300	300				438				7,29
112-010-01400	EW40-400	400				538				8,98
112-010-01450	EW40-500	500				638				10,61
112-010-01500	EW40-600	600				738				12,28
112-010-01550	EW50-300	300	70	60	50	450	3/8"	50	30	10,47
112-010-01600	EW50-400	400				550				12,86
112-010-01650	EW50-500	500				650				15,14
112-010-01700	EW50-600	600				750				17,50

Technische Daten am Anfang der Rubrik Zylinder